



Description

General

This QuickTeX® QSFP28 transceiver is a quad small form-factor pluggable module for serial optical data communications such as IEEE 802.3bm 100GBASE-SR4. It is with the QSFP28 38-pin connector to allow hot plug capability. The internally ac coupled high speed serial I/O simplifies interfacing to external circuitry. A serial EEPROM in the transceiver allows the user to access transceiver digital diagnostic monitoring and configuration data via the 2-wire QSFP28 Management Interface.

Transmitter Section

The transmitter section uses four Vertical Cavity Surface Emitted Lasers (VCSEL).In addition, this component is also class 1 laser that compliant with International Safety Standard IEC-60825-1:2014. It complies with EN60825-1:2014/A11:2021 and FDA 21 CFR 1040.10 and 1040.11

Receiver Section

The receiver incorporates four GaAs PIN photodiodes integrated with four trans-impedance preamplifiers (TIA) and four limiting post-amplifier ICs.

QSFP-100G-SR4-S Compatible 100GBASE-SR4 QSFP28 850nm 100m

MPO Type with DDM

QT-MM4-QSFP28-100G-100M

Features

- Single +3.3V Power Supply
- Compliant with SFF-8636, QSFP28 MSA
- Compliant with IEEE 802.3bm 100GBASE-SR4
- Hot Pluggable Electrical Interface
- Up to 70m with OM3 MMF
- Up to 100m with OM4 MMF
- Class 1 Laser International Safety Standard IEC-60825-1:2014 Compliant. Complies with EN60825-1:2014/A11:2021 and FDA 21 CFR 1040.10 and 1040.11
- Commercial Operation Temp.: 0 °C to +70 °C
- MPO optical connector
- RoHS Compliant

Applications

- 100GBASE-SR4 100G Ethernet Links
- Data Center Switches and Router

Performance Specifications

<u> </u>					
Absolute Maximum Ratings					
Parameter	Symbol	Min	Тур	Max	Unit
Supply Voltage	Vcc	-0.5	-	4	V
Storage Temperature	Ts	-40	-	85	°C
Relative Humidity(non-condensing)	RH	0	-	85	%

Recommended Operating Conditions and Power Supply Requirements					
Parameter	Symbol	Min	Тур	Max	Units
Operating Case Temperature	Тор	0	-	70	∘C
Supply Voltage	Vcc	3.135	3.3	3.465	V
Data Rate, each Channel	В	ı	25.78125	Ī	Gbps
Supply Noise Rejection	-	ı	-	100	mv
Operating Distance(@OM3 MMF)	L	-	-	70	m
Operating Distance(@OM4 MMF)	L	ı	-	100	m
Supply Current	Icc	-	-	1050	mA
Power Dissipation	PD	-	-	3.5	W





















Optical Characteristics

Transmitter Optical Characteristics							
Parameter	Symbol	Min	Тур	Max	Unit		
Average Launch Power, each Lane	Po, avg	-8.4	-	2.4	dBm		
Optical Modulation Amplitude(OMA), each lane	Po, oma	-6.4	-	3	dBm		
Center Wavelength	λο	840	850	860	nm		
Spectral Width	$\Delta\lambda_{(RMS)}$	-	-	0.6	nm		
Extinction Ratio*	ER	3	-	-	dB		
Optical return loss	PR	-	-	12	dB		
Average Launch Power of OFF Transmitter, each Lane		-	-	-30	dBm		
Receiver Optical Characteristics							
Parameter	Symbol	Min	Тур	Max	Unit		
Damage Threshold	THd	3.4	-	-	dBm		
Average receive power, each Lane	Pin	-10.3	-	2.4	dBm		
Center Wavelength	λς	840	850	860	nm		
Receiver Reflectance	R_R	-	-	-12	dB		
Receiver Power(OMA), each Lane	P _{S,OMA}	-	-	3	dBm		
*Receiver Sensitivity(OMA)	Rs, _{OMA}	-		-7.2	dBm		
Signal Detect-Asserted	PA	-30			dBm		
Signal Detect-Deasserted	PD	-	-	-10.5	dBm.		
Signal Detect-Hysteresis	P _A -P _D	0.5	-	-	dB		

^{*}Measured with a PRBS 2³¹-1 test pattern @25.78125 Gbps, BER<5e⁻⁵.


Digital Diagnostic Accuracy


Parameter	Typical Value	Note
Transceiver Temperature	± 3°C	$T_{OP\text{-min}} \sim T_{OP\text{-max}}$
Power Supply Voltage	± 3%	Vcc
TX Bias Current	± 10%	
TX Optical Power	± 3dB	$P_{O, AVG-min} \sim P_{O, AVG-max}$
RX Optical Power	± 3dB	P _{in-min} ~ P _{in-max}





QSFP+ Transceiver Electrical Pad Layout





Top Side Viewed from Top

Bottom Side Viewed from Bottom

Pinout Table

Pin	Symbol	Name/Description	Ref.
1	GND	Ground	1
2	Tx2n	Transmitter Inverted Data Input	
3	Tx2p	Transmitter Non-Inverted Data output	
4	GND	Ground	1
5	Tx4n	Transmitter Inverted Data Input	
6	Tx4p	Transmitter Non-Inverted Data output	
7	GND	Ground	1
8	ModSelL	Module Select	
9	ResetL	Module Reset	
10	VccRx	+3.3V Power Supply Receiver	2
11	SCL	2-Wire Serial Interface Clock	
12	SDA	2-Wire Serial Interface Data	
13	GND	Ground	
14	Rx3p	Receiver Non-Inverted Data Output	
15	Rx3n	Receiver Inverted Data Output	
16	GND	Ground	1
17	Rx1p	Receiver Non-Inverted Data Output	





Rx1n	Receiver Inverted Data Output	
GND	Ground	1
GND	Ground	1
Rx2n	Receiver Inverted Data Output	
Rx2p	Receiver Non-Inverted Data Output	
GND	Ground	1
Rx4n	Receiver Inverted Data Output	1
Rx4p	Receiver Non-Inverted Data Output	
GND	Ground	1
ModPrsL	Module Present	
IntL	Interrupt	
VccTx	+3.3 V Power Supply transmitter	2
Vcc1	+3.3 V Power Supply	2
LPMode	Low Power Mode	
GND	Ground	1
Тх3р	Transmitter Non-Inverted Data Input	
Tx3n	Transmitter Inverted Data Output	
GND	Ground	1
Tx 1p	Transmitter Non-Inverted Data Input	
Tx 1n	Transmitter Inverted Data Output	
GND	Ground	1
	GND GND Rx2n Rx2p GND Rx4n Rx4p GND ModPrsL IntL VccTx Vcc1 LPMode GND Tx3p Tx3n GND Tx 1p Tx 1n	GND Ground Rx2n Receiver Inverted Data Output Rx2p Receiver Non-Inverted Data Output GND Ground Rx4n Receiver Inverted Data Output Rx4p Receiver Non-Inverted Data Output GND Ground ModPrsL Module Present IntL Interrupt VccTx +3.3 V Power Supply transmitter Vcc1 +3.3 V Power Supply LPMode Low Power Mode GND Ground Tx3p Transmitter Non-Inverted Data Input Tx3n Ground Tx 1p Transmitter Non-Inverted Data Input Tx 1n Transmitter Inverted Data Output

Notes:


- 1. Module ground pins GND are isolated from the module case and chassis ground within the module.
- 2. Vcc Rx, Vcc1 and Vcc Tx are the receiver and transmitter power supplies and shall be applied concurrently. Vcc Rx Vcc1 and Vcc Tx may be internally connected within the QSFP+ module in any combination.





Package Outline Drawing

DIMENSIONS ARE IN MILLIMETERS (unit:mm)

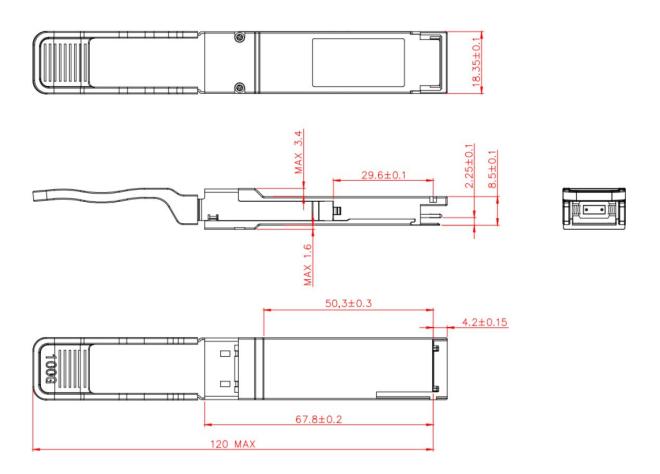

Eye Safety

The transceiver is a class 1 laser product. It complies with EN60825-1:2014/A11:2021 and FDA 21 CFR 1040.10 and 1040.11. In order to meet laser safety requirements the transceiver shall be operated within the Absolute Maximum Ratings.

Caution

All adjustments have been done at the factory before the shipment of the devices. No maintenance and user serviceable part is required. Tampering with and modifying the performance of the device will result in voided product warranty.