

NOTES: THIS IS A GERNERAL DEPICTION OF QUICKTREX ASSEMBLY BUILD SPECIFICATIONS. FOR FURTHER CUSTOMIZATION CONTACT LANSHACK.




## PRE-TERMINATED FIBER OPTIC CABLE ASSEMBLY BUILD SPECIFICATIONS

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
C	-	QUICKTREX BUILD SPECIFICATIONS	T.D.	6/11/2021	A.D.

MANUFACTURED IN THE USA | TAA COMPLIANT

- MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
- CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3.
- ALL FIBER WILL BE CORNING GLASS OR EQUIVALENT.
- ALL MULTI-STRAND FIBER ASSEMBLIES WILL BE CONSTRUCTED USING 2 MM FURCATION TUBING BREAKOUT FOR EACH STRAND.
  - TUBING WILL BE COLOR CODED OR SEQUENTIALLY LABELED.
- THE BUFFER TUBES WILL BE FASTENED TO THE OUTER JACKET USING HEAT SHRINK TUBING. HEAT SHRINK TUBING WILL BE USED AT:
  - THE TRANSITION FROM THE BUFFER TUBES TO THE CABLE JACKET.
  - WHERE THE BASKET MEETS THE TURN BUCKLE (PULLEYE HOOK).
  - WHERE THE BASKET ENDS AND THE CONNECTS WITH THE CABLES JACKET.
- ONE WRAP AROUND LABEL IS ATTACHED TO EACH END FOR IDENTIFICATION. THE LABEL WILL INCLUDE THE PART # AND AN INDIVIDUAL SERIAL NUMBER.
- THE BREAKOUT AND CONNECTORS WILL BE PACKAGED IN CLEAR STRETCH PLASTIC TO PROTECT FROM CONTAMINANTS.
- OPTIONAL PULLEYES / BASKETS ARE MADE FROM SUPER STRONG POLYETHYLENE MESH AND FEATURE A FREE SPINNING BUCKLE TO ELIMINATE TWISTING OF THE CABLE DURING THE PULL.
- BREAKOUT LENGTHS VARY DEPENDING ON STRAND COUNT.
  - 2 AND 4 STRAND ASSEMBLIES: 14"
  - 6 STRAND ASSEMBLIES: 18"
  - 12 STRAND ASSEMBLIES: 24"
  - 24 STRAND ASSEMBLIES: 36"
  - CONNECTORS ARE STAGGERED
  - CONNECTOR ONE IS THE LONGEST STRAND
- ALL FIBER ENDS ARE 100% TESTED FOR OPTICAL PERFORMANCE AND INSPECTED WITH A FIBERSCOPE OF 400 POWER OR MORE FOR SURFACE DEFECTS INCLUDING CRACKING, PITTING, AND SCRATCHES ON THE GLASS SURFACE. ALL ENDS ARE TESTED UTILIZING A PROFESSIONAL GRADE LOSS TEST SET TO THE FOLLOWING STANDARDS:
  - MULTIMODE: 62.5/125 & 50/125: IL MAX 0.2DB, MIN -0.1DB
  - SINGLEMODE: IL MAX 0.2dB MIN -0.1dB ORL (OPTICAL RETURN LOSS) -55dB

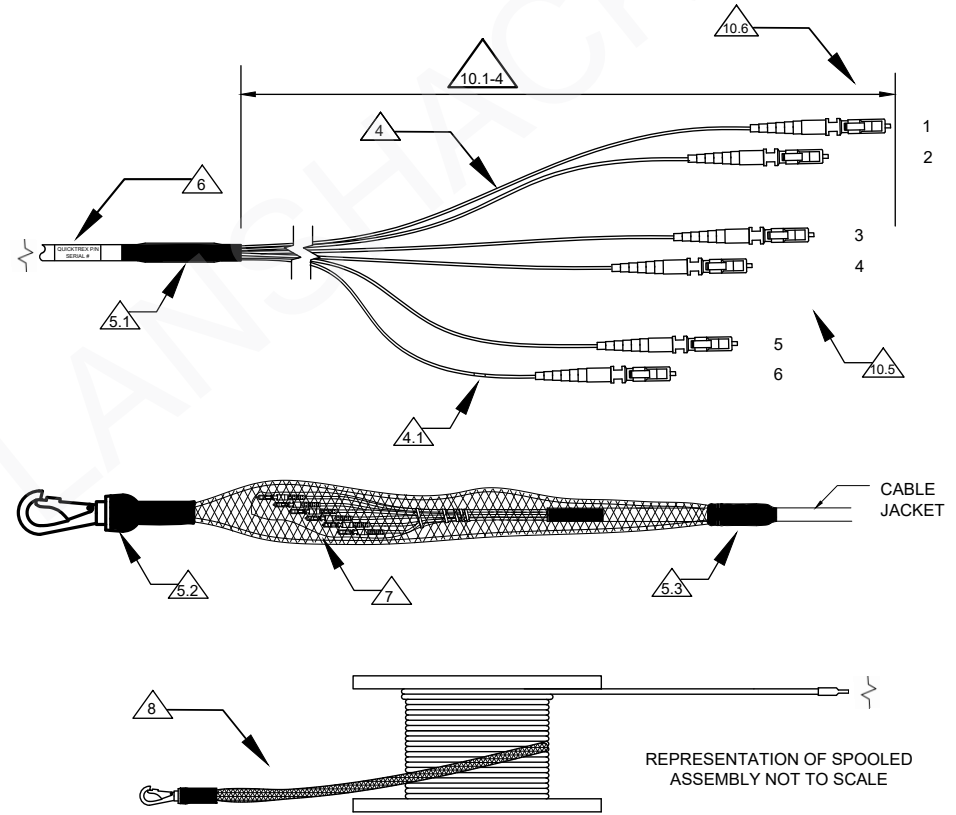

NOTE: ASSEMBLIES 100FT AND OVER WILL COME ON A SPOOL. ASSEMBLIES UNDER 100FT WILL BE AIR SPOOLED

QUICKTREX BUILD MATERIAL LIST			CONNECTOR OPTIONS	
ITEM	QTY	COMPONENT		
8	VARIABLES	SWIVEL PULLING EYE & MESH BASKET	LC	
7	1	SPOOL	SC	
7	1	REEL LABEL	ST	
6	2	QUICKTREX CABLE LABEL	FC	
5	VARIABLES	HEAT SHRINK TUBING	POLISH TYPES: PC, UPC, APC	
4	1	TEST REPORT	<b>ISO 9001 CERTIFIED</b>	
3	2	SINGLE LEG BREAKOUT: FIBER STRANDS, 2.0mm FURCATION TUBING		
2	1	CORNING GLASS OR EQUIVALENT DISTRIBUTION FIBER		
1	VARIABLES	FIBER OPTIC CONNECTORS		

DESCRIPTION: THIS IS A SAMPLE REPRESENTATION OF STANDARD QUICKTREX BUILD SPECIFICATIONS

DRAWN BY:	T. DAMIANO	08/17/2020
APVD BY:	A. DAMIANO	08/18/2020

**LANshack**  
1-888-568-1230 or Sales@LANshack.com

DIMENSIONS: METRIC [IMPERIAL]		TITLE: QuickTrex Pre-Terminated Fiber Optic Cable Assemblies		
PROPRIETARY AND CONFIDENTIAL	SIZE A	DWG. NO. QT-PFOA-B-SPECS-100	REV D	
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF LANSHACK. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.			SCALE: NOT TO SCALE	SHEET 1 OF 1