



NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD.

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

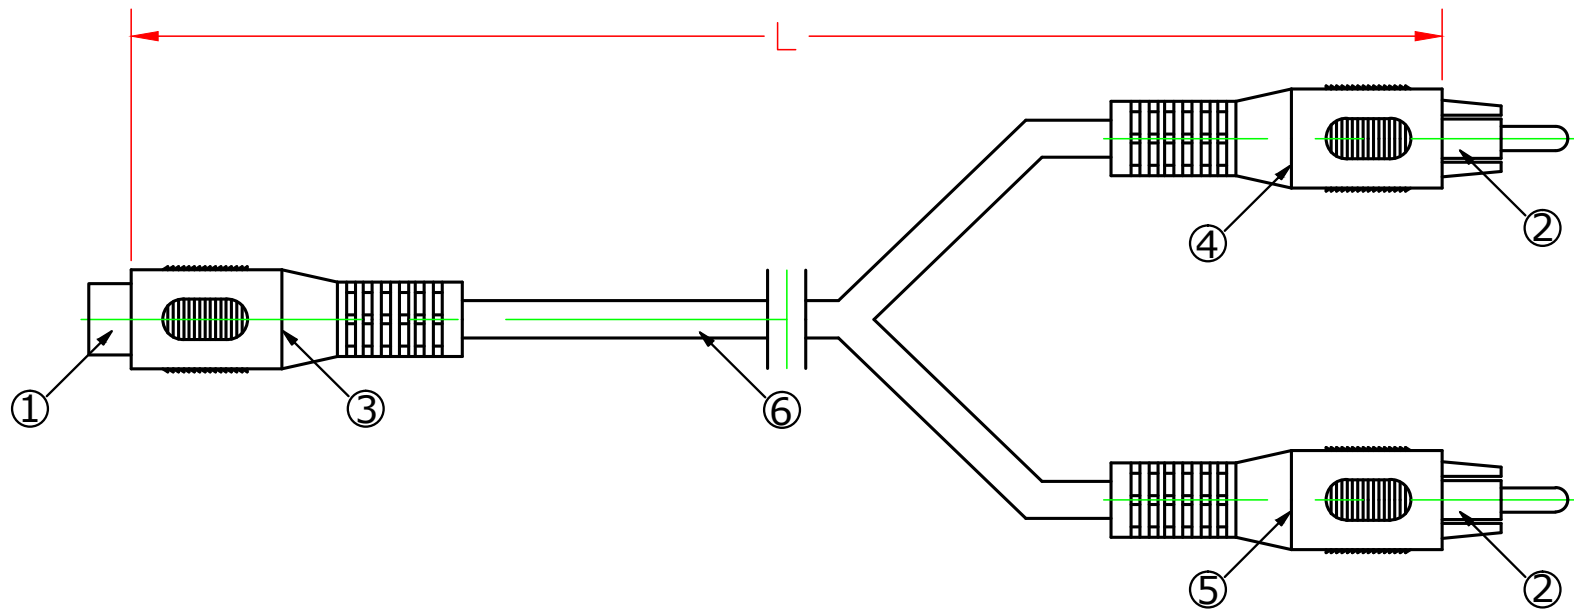

CONNECTION

RCA Jack      2 RCA Plug



**ELECTRICAL TESTING**  
**1. CONDUCTOR RESISTANCE: ≤5Ω 300V DC**

⑥	<b>Cable</b>	<b>Cable 2CX(10/0.12CCS)+28/0.10CCS OD.: 2.6X5.2 Black PVC Jacket</b>	1	PC
⑤	<b>PVC</b>	<b>PVC Red</b>	1	PC
④	<b>PVC</b>	<b>PVC White</b>	1	PC
③	<b>PVC</b>	<b>PVC Black</b>	1	PC
②	<b>RCA Male</b>	<b>RCA Male-Nickel Plated</b>	2	PCS
①	<b>RCA Female</b>	<b>RCA Female-Nickel Plated</b>	1	PC
NO.	PART NAME	SPECIFICATION DESCRIPTION	Q'TY	UNIT

## LANshack

Sales@LANshack.com | 888-568-1230

DRAWN BY	DATE: 2013/07/23	DESCRIPTION: <b>RCA-Female to RCA-Male x2</b>
CHECKED BY	SHEET 1 of 1	ITEM NO. LS-AVC-RCA-1F-2M-XX
APPROVED BY	SCALE 1:1	REV. 00    UNIT: mm